


## CICLONE SEPARATORE

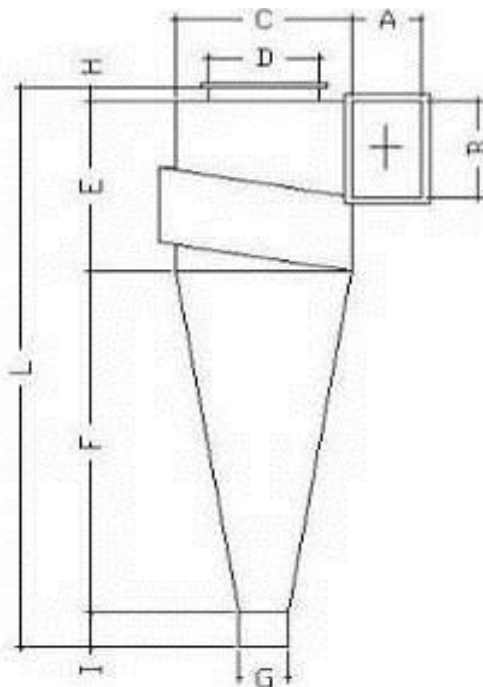

### CARATTERISTICHE TECNICHE

| DATI |           |               | DIMENSIONI (mm) |     |      |     |      |      |     |     |     |      |
|------|-----------|---------------|-----------------|-----|------|-----|------|------|-----|-----|-----|------|
| Tipo | Q<br>mc/h | mm c.a.<br>HS | A               | B   | C    | D   | E    | F    | G   | H   | I   | L    |
| 3,5  | 1000      | 68            | 80              | 200 | 350  | 250 | 400  | 800  | 100 | 30  | 80  | 1310 |
| 4,8  | 1500      | 65            | 100             | 230 | 480  | 300 | 460  | 1100 | 130 | 30  | 80  | 1670 |
| 6    | 2000      | 62            | 130             | 250 | 600  | 320 | 500  | 1400 | 150 | 50  | 100 | 2050 |
| 6,5  | 2500      | 62            | 130             | 300 | 650  | 350 | 600  | 1500 | 150 | 50  | 130 | 2280 |
| 7    | 3000      | 58            | 150             | 320 | 700  | 380 | 640  | 1650 | 180 | 50  | 130 | 2520 |
| 7,5  | 4000      | 57            | 150             | 430 | 750  | 420 | 860  | 1800 | 200 | 80  | 150 | 2890 |
| 8    | 4500      | 57            | 150             | 450 | 800  | 480 | 900  | 1900 | 230 | 80  | 150 | 3060 |
| 9,5  | 5600      | 56            | 150             | 550 | 950  | 550 | 1100 | 2150 | 250 | 80  | 150 | 3530 |
| 11   | 8000      | 56            | 180             | 700 | 1100 | 580 | 1400 | 2200 | 280 | 80  | 180 | 3900 |
| 12   | 9500      | 51            | 200             | 750 | 1200 | 720 | 1500 | 2400 | 300 | 80  | 180 | 4250 |
| 12,5 | 11000     | 50            | 200             | 800 | 1250 | 750 | 1600 | 2600 | 380 | 80  | 200 | 4550 |
| 13   | 13000     | 50            | 220             | 820 | 1300 | 780 | 1640 | 2700 | 350 | 100 | 200 | 4640 |
| 14,5 | 16000     | 49            | 240             | 850 | 1450 | 850 | 1700 | 2800 | 380 | 100 | 220 | 4870 |
| 16,5 | 20000     | 48            | 250             | 880 | 1650 | 950 | 1760 | 2900 | 380 | 100 | 220 | 4980 |